



34 CENTER CONSOLE



SPECIFICATIONS

LOA:34' / 10.36 m
 Beam:9' 6" / 2.9 m
 Weight, dry:10,200 lbs. / 4,627 kgs.
 Fuel capacity:300 gal. / 1,136 L
 Optional fuel: 161 gal. / 609 L
 (Deletes forward floor storage)
 Water capacity:.....30 gal. / 114 L
 Draft w/engines down:..... 31" / 0.8 m
 Draft w/engines up:.....24" / 0.6 m
 Bridge clearance:98" / 2.5 m
 Recommended power:
 Triple Mercury 275 Verados
 Speed:.....70+ MPH
 Hull Warranty: 6 Years
 Cruise (Fuel) @ 50 MPH:..... 39 GPH
 WOT (Fuel) w/Triple 275 Verados:..... 70 MPH @ 86 GPH
 Maximum Cruising Range:..... 346 miles @ 90% Capacity

POWER OPTIONS

Twin Mercury 250 Optimax XS
 Twin Mercury 300 Optimax XS
 Twin Mercury 250 Verados
 Twin Mercury 275 Verados
 Twin Mercury 300 Verados

Triple Mercury 250 Optimax XS
 Triple Mercury 300 Optimax XS
 Triple Mercury 250 Verados
 Triple Mercury 275 Verados
 Triple Mercury 300 Verados



34 CENTER CONSOLE

STANDARD EQUIPMENT

Anchor locker, recessed in forward bulkhead
Backrest, fixed w/rod holders
Batteries (3 triple engine, 2 twin engine), w/secured heavy-duty custom brackets
Battery switches (3 triple engine, 2 twin engine), parallel, explosion-proof
Bilge pumps (2), automatic 1200 gph
Bow step, folding aluminum
Center console, pre-wired, fiberglass w/flush mount electronics locker, one-piece plexiglass windshield, molded footrest, walk-in head w/VacuFlush, shower, sink, and 25 quart cooler under forward-facing seat
Cleats, pop-up bow w/amidships and stern (with hawse pipe)
Compass
Console cup holders, stainless steel
Fish boxes, 4 under floor w/macerator & overboard drain (800 qt. total capacity)
Fuel gauge, electric
Fuel tank, heavy-duty, baffled, welded inside and out, 3/16" aluminum, powder-coated, 300 gallons, foamed, glassed and bolted in position w/stainless steel pickups
GPS speedometer & Mercury Smartcraft gauges
Graphics, standard selection
Hand laid composite hull and deck manufactured w/multi-directional fiberglass, w/high density coring and Interplastic vinyl ester resin and w/hull and deck laminated, thru-bolted, screwed and sealed together w/heavy duty marine sealant/adhesive
Helm seat, leaning post style w/ fixed backrest & rod holders
Helm station, full instrumentation, molded footrest, cup holders, grab rail and glove box
Horns, electric
Innerliner, fiberglass, self-bailing w/non-skid surfaces and storage
Lights, halogen (rear mounted)
Lights, navigation
Livewell at transom, 50 gallons
Propellers, polished stainless steel
Rails, bow, welded 316L stainless steel, thru-bolted
Remote oil tank fills (Optimax engines only)
Rod/gaff storage (4 under gunwales, 6 under floor)
Rod holders (4 in gunwales)


Rubrail with stainless steel insert
Salt water wash down w/extra pump
Sink w/pressurized water system
Steering, hydraulic, w/tilt steering wheel
T-Top heavy duty w/radio & electronics box, canvas and rod holders
Trim indicators for engines and tabs, electronic for engines and mechanical for trim tabs
Trim tabs, heavy-duty hydraulic, offshore hi-performance

OPTIONAL EQUIPMENT

Autopilot, TR-1 Gladiator
Canvas Side Curtains
CE Certification Kit
Depth Gauge
Forward Arch with Bimini
Fresh Water Washdown
Halogen Light (Additional, Front-Top Mounted)
Life Jacket Storage in T-Top
Jumper Cable with Receptacle
Oscillating Fan in Head
Pop-Up Bow Light
Remote Spotlight on Bow
Remote Spotlight on Half Tower
Rod Holders, Kingfish (2) Angled on T-Top
Shipping Cradle
Sirius Satellite Radio
Swim Ladder with Bracket Mount



34 CENTER CONSOLE

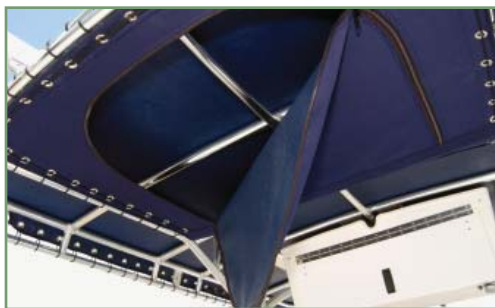

Fountain Powerboats Performance Disclaimer

Be advised that performance figures are merely an estimate, not a guarantee, of what you can expect based on our factory testing program. The above listed speeds are verified by radar or GPS or both with one test driver and less than a forty (40) gallon fuel load. Boat speeds and range can vary depending on weight, fuel load, number of passengers, air temperature, altitude, humidity, barometric pressure, water conditions, wind, engine tuning, horsepower (HP) variance from engine to engine, propellers, and numerous other factors beyond our control. Fountain Powerboats reserves the right to make changes on standard and optional equipment at any time without prior notice. Useable fuel in a gas tank may be slightly less than the advertised fuel capacity. Speed variance can be up to 4% of the top speed.

Fountain Powerboats Options Disclaimer

Fountain Powerboats reserves the right to make changes on standard and optional equipment at any time without prior notice. Some options may have changed since the print date of this material.

Revised 2007